
AMBRETA

MANUAL INSTRUCTION

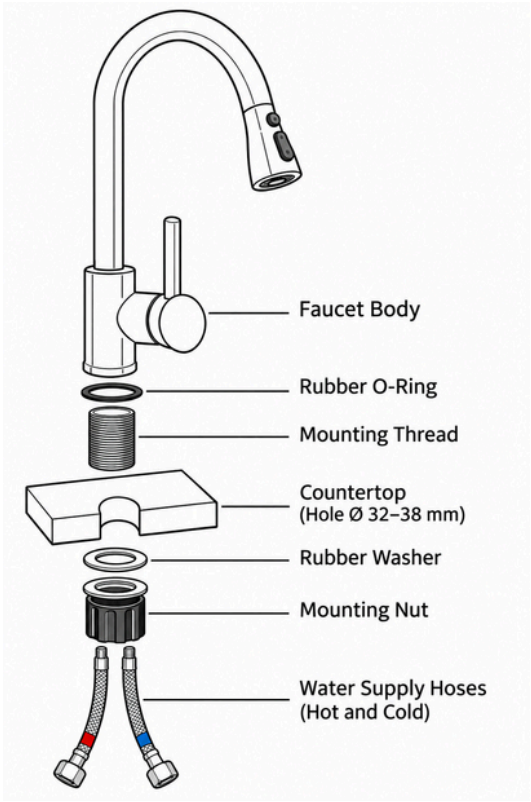

Instructions of Installation

1,Remove the thread from the body, and the two hoses pass through the thread into the screw hole at the bottom of the body and tighten it. Then screw the thread into the body. Put the body and rubber ring into the installation hole, and put the Rubber gasket and nut into the thread and lock it.
2, Connect the angle valve with the hose and tighten the nut. Note: Left hose for hot water,right hose for cold water.
3, Confirm that the hose has been installed, and then carry out the water test. Open the angle valve, turn on and off the faucet handle, check whether the faucet is normal working, and check the sealing of the connection of each part to ensure that there is no leakage.

Instructions for Use

Theuseof single handle: the handle is moved backward, and the tap is out of the water; Conversely,tum off the tap. The handle moves to the left, hot water increases, cold water decreases,and water temperature increases. Conversely, the water temperature decreases.



Technical Sheet

Product dimensions: Height 41cm, width 26cm	
Product name: AMB26-03	Hose length: 70cm
Gross weight: 1700gr	Net weight: 1300gr
Inlet size: 3/8	Color: brushed
Spout reach: 21cm	EAN: AMB26-03

Material and Construction

Body material: 304 stainless steel
Cartridge: #35 POM food-grade ceramic
Lead free construction: Yes
PEX material inlet hoses (non-toxic; odor free): Yes
Working maximum pressure: 1.0 MPa
Working maximum temperature: 99℃

Installation Specification

Installation type: Manual installation
Mounting type: Deck Mounted
Number of holes required: 1
Handle type: Long handle, up and down switch
Kind of material: Stainless steel

Included components


1 x Kitchen tap
2 x 70cm inlet hoses (hot and cold)
Hardware and mounting accessories
Anti-slip base pad
Fixingnut and o-rings

Features

Pull-outspout
Cold-start valve for energy saving
High performance aerator for water efficiency Leak-proof seal structure.

AMBRETA

MANUALE DI ISTRUZIONI

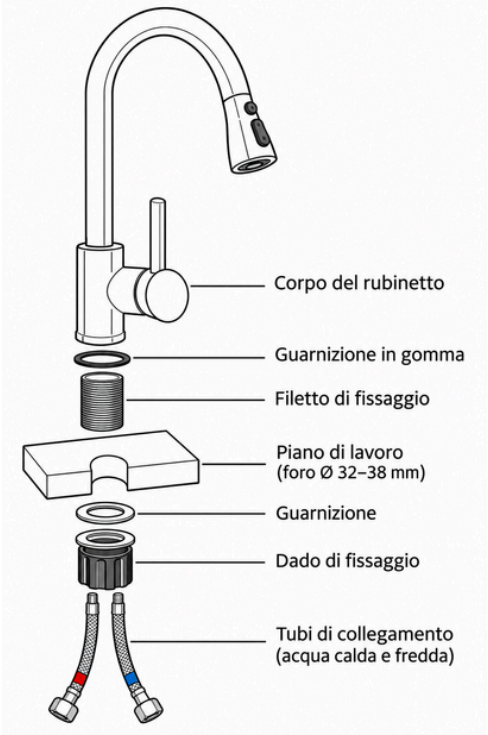

Scheda Tecnica

Dimensioni del prodotto: Altezza41 cm, larghezza 26 cm	
Nome prodotto:AMB26-03	Lunghezza dei tubi: 70cm
Peso lordo: 1700gr	Peso netto: 1300gr
Dimension idi ingresso: 3/8	Colore: spazzolato
Profondità rubinetto: 21cm	EAN: AMB26-03

Materiali e Costruzione

Materiale del corpo: acciaio inox 304
Cartuccia: #35 POM Cartuccia in ceramica
Struttura priva di piombo: sì
Tubi di ingresso in materiale PEX (atossici e inodori): sì
Pressione massima di esercizio: 1,0MPa
Temperatura massima di esercizio:99 °C

Specifiche di Installazione

Tipo di installazione: installazione manuale
Tipo di montaggio: montaggio su piano
Numero di fori richiesti: 1
Tipo di maniglia: leva lunga con comandosu/giù
Materiale: acciaio inox

Istruzioni di Installazione

1,Rimuoverela filettatura dalcorpo e far passare i due tubi attraverso la filettatura nel foro della vite sul fondo del corpo e serrarla. Quindi avvitare la filettatura nel corpo. Inserire il corpo e l'anello di gomma nel foro di installazione e inserire la guarnizione di gomma e il dado nella filettatura e bloccarli.

2, Collegare la valvola ad angolo ai tubi flessibili e serrare il dado. Nota: il tubo a sinistra è per l'acqua calda, l'altro è per l'acqua fredda.

3, Verificare che i tubi siano installati correttamente, quindi procedere con il test dell'acqua. Apri la valvola ad angolo, ruota la manopola del rubinetto, verifica che il rubinetto funzioni correttamente e controlla che non ci sianoperdite in tutti i collegamenti.

Istruzioni per l'uso

Utilizzodella leva monocomando: spostando la leva all'indietro, il rubinetto eroga acqua; riportandola nella posizione iniziale, l'erogazione si interrompe.

Spostando la leva verso sinistra, aumenta il flusso di acqua calda e diminuisce quello di acqua fredda, con conseguente aumento della temperatura dell'acqua. Viceversa, spostando la leva verso destra, la temperatura dell'acqua diminuisce.



Componenti inclusi

1 rubinetto da cucina
2 tubi di ingresso da 70 cm
Ferramenta e accessori di montaggio
Base antiscivolo
Dado difissaggio eO-ring

Caratteristiche

Beccuccio estraibile
Valvola con avvio a freddo per il risparmio energetico
Aeratore ad alte prestazioni per la massima efficienza
Struttura di tenuta a prova di perdite

WWW.AMBRETA.IT